

R-TEC AUTOMATION[®] by Rowley[®]



SHADE DATABOOK
R-TEC Automation[®] Shade Motors



R-TEC Automation® is a convenient, comfortable, lifestyle solution that integrates smart technology solutions allowing you to conveniently control window treatments throughout the home.

The R-TEC Automation® Hub and App integration allow window treatments to be controlled directly from a smartphone or integrated device while at home or away.

As an alternative, remotes and wall switches allow for individual, group and all control for a customized solution with 1, 5 or 15 channel options.

TABLE OF CONTENTS

R-TEC Shade Motors General Info, Features & Specs	4 - 5
Wirefree Tubular Motors	6 - 7
Parts List	
Installation Instructions	
Motor & Power Option Dimensions	
Motor Selection Guide for Roller Shades	
Wirefree Tubular Motor with Attached Wand Control	8 - 9
Parts List	
Installation Instructions	
Motor & Power Option Dimensions	
Motor Selection Guide for Roller Shades	
DC Tubular Motors	10 - 13
Parts List	
Installation Instructions	
Motor & Power Option Dimensions	
Motor Selection Guide for Roller Shades	
Mounting Battery Tube or Pack to the Dustboard	
Skyline Easy Link System	13
Parts List	
Motor Selection Guides for Roman Shades	14 - 15
Wirefree Tubular Motors	
Wirefree Tubular Motor with Attached Wand Control	
DC Tubular Motors	
Roman Shade Cross Section	
Skyline Brackets	16 - 17
Bracket & Cover Dimensions	
Bracket Selection Guide for Roller Shades	
Custom Solutions	17
R-TEC Smart Controls	18 - 19

SHADE MOTORS

This document presents the technical information for our R-TEC Automation[®] Shade Motors and related R-TEC Smart Controls. It provides detailed information to facilitate the specification of these motor solutions and presents information regarding options for designer applications. Visit RowleyCompany.com for more information on the entire R-TEC Automation[®] product line of Motors, Power Sources, R-TEC Smart Controls and more.

FEATURES



2-Way RF
Communication



Leveling
Control



Preferred Upper /
Lower Limit Settings



Favorite
Position



Adjustable
Speed



Quiet
Operation

Wand Features

Wirefree & DC Features

MOTOR SPECS

See spec sheets for more details on each motor type

	Voltage	Sound Level	Max. Run Time
Wirefree Tubular Motors	12 V DC	~44 DB to ~53 DB	10 min.
Wirefree Tubular Motor with Attached Wand Control	12 V DC	~46 DB	10 min.
DC Tubular Motors	12 V DC	~44 DB to ~53 DB	10 min.

MOTOR PERFORMANCE ON SHADES

	Tube Dia.	Max. Size	Min. Shade Width / Roller Tube Length	Max. Load
Wirefree Tubular Motor 25 mm	1 1/4"	84" x 84"	23"	15 1/2 lbs.
	1 1/2"	84" x 84"	23"	13 lbs.
Wirefree Tubular Motor 28 mm	1 1/2"	120" x 120"	29 1/2"	23 1/2 lbs.
	2"	120" x 120"	29 1/2"	17 1/2 lbs.
Wirefree Tubular Motor 35 mm	2"	120" x 120"	32"	26 1/2 lbs.
Wirefree Tubular Motor with Attached Wand Control 25 mm	1 1/4"	84" x 84"	23"	15 1/2 lbs.
	1 1/2"	84" x 84"	23"	13 lbs.
DC Tubular Motor 25 mm	1 1/4"	84" x 84"	15 1/2"	15 1/2 lbs.
	1 1/2"	84" x 84"	15 1/2"	13 lbs.
DC Tubular Motor 28 mm	1 1/2"	120" x 120"	21 1/2"	23 1/2 lbs.
	2"	120" x 120"	21 1/2"	17 1/2 lbs.
DC Tubular Motor 35 mm	2"	120" x 120"	23 1/2"	26 1/2 lbs.

APPLICATIONS

See spec sheets for more details on each motor type



Roller Shade



Roman Shade




Narrow Applications

POWER OPTIONS



Battery Powered



Battery Pack



Battery Tube



Power Supply



Solar Panel Battery Charger

R-TEC SMART CONTROLS



Handheld Remotes
1, 5 or 15 Channel



Surface Mount Wall
Switch 5 Channel



Wall Box Mount
Switch 15 Channel



Wi-Fi to ARC Bridge
Hub, 2-way RF



Interior
Sun Sensor



ARC USB Signal
Repeater & Charger



The Hub and R-TEC Automation® App integration allow window treatments to be controlled directly from a smartphone or integrated device while at home or away. Available on the Apple® App Store or Google Play™.




WIREFREE TUBULAR MOTORS



PARTS LIST

1. Wirefree Tubular Motor
 - a. 25 mm Motor Size: RTML25
 - b. 28 mm Motor Size: RTMLQ28
 - c. 35 mm Motor Size: RTML35
2. Battery Charger RTMLBC or RTMSOLAR2
3. Aluminum Roller
 - a. Length Options: 4', 6', 8', 12' or 16'
 - b. Roller Size: 1 1/4", 1 1/2" or 2"
4. Drive Set Kit - matches Motor & Aluminum Roller Size
5. Brackets & Bracket Covers (covers are optional for Roller Shade only)
6. R-TEC Smart Controls: Custom systems include 1 Channel Handheld Remote with Wall Mount. Additional control options shown on [pages 18 - 19](#).
7. Additional Roman or Roller Components:
 - a. If building Roman Shade:
 - Lift Band Shade - Lift Band Material, Fiberglass Ribs, Rib Center Support Rings & End Caps & Weight Bar
 - Lift Cord Shade - Soft Shade Roller Clips, Encased Lift Cord Shroud Tube or Tape & Weight Bar
 - b. If building Roller Shade:
 - Weight Bar

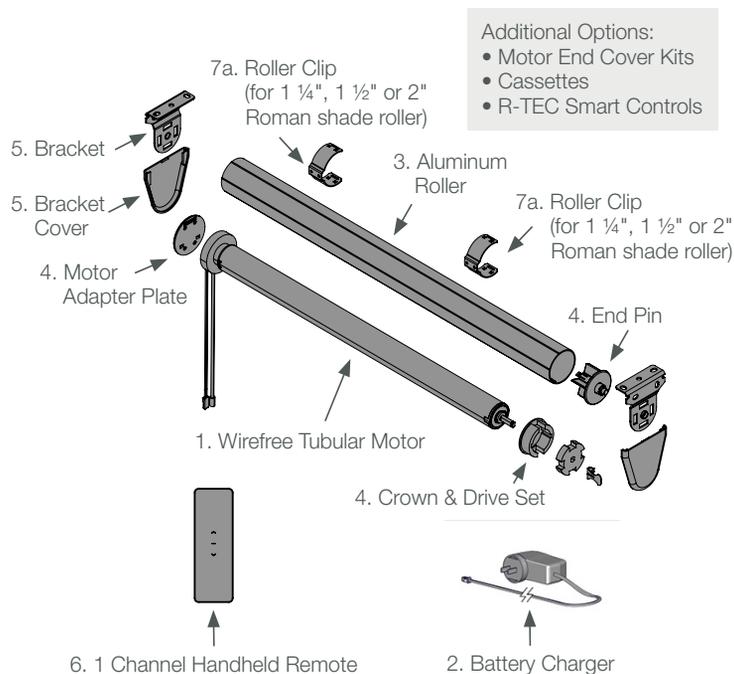


Installation Instructions:




MOTOR & POWER OPTION DIMENSIONS

Wirefree Tubular Motor

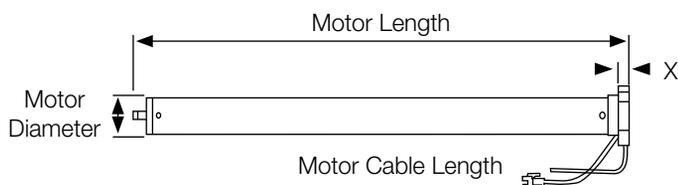


	Motor Size	Motor Length	Motor Diameter	X	Motor Cable Length
RTML25	25 mm	17.625"	0.98"	0.35"	4.25"
RTMLQ28	28 mm	25.60"	1.13"		5"
RTML35	35 mm	33.41"	1.38"		2.36"

Battery Charger RTMLBC

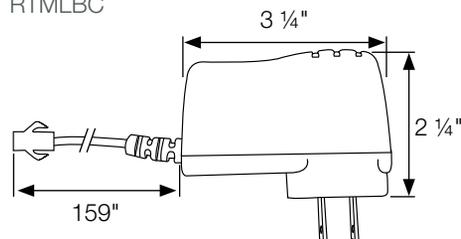


Solar Panel Battery Charger RTMSOLAR2

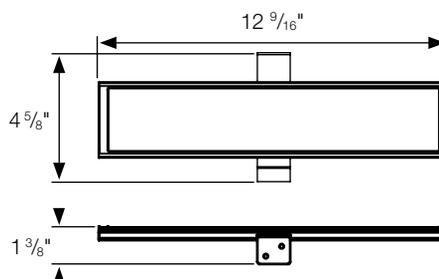


MOTOR SELECTION GUIDE FOR ROLLER SHADES

- Find the chart with the proper range of the shade fabric weight.
- In the chart, find the shade width and drop. The color-coded boundaries indicate the systems that will work with the shade you are considering. There are usually more than one choice. Choose a system so your shade is well within its boundary.
- If there are multiple shades in one room or along the same wall, one should usually choose the same tube diameter and motor for all of them if possible, so shades will operate in sync.
- If the shade is narrow and to the left side the system boundary, consider using DC tubular motor systems.
- For the Motor Selection Guide for Roman Shades, see [page 14](#).


Fabric weight that is less than 10 ounces per square yard

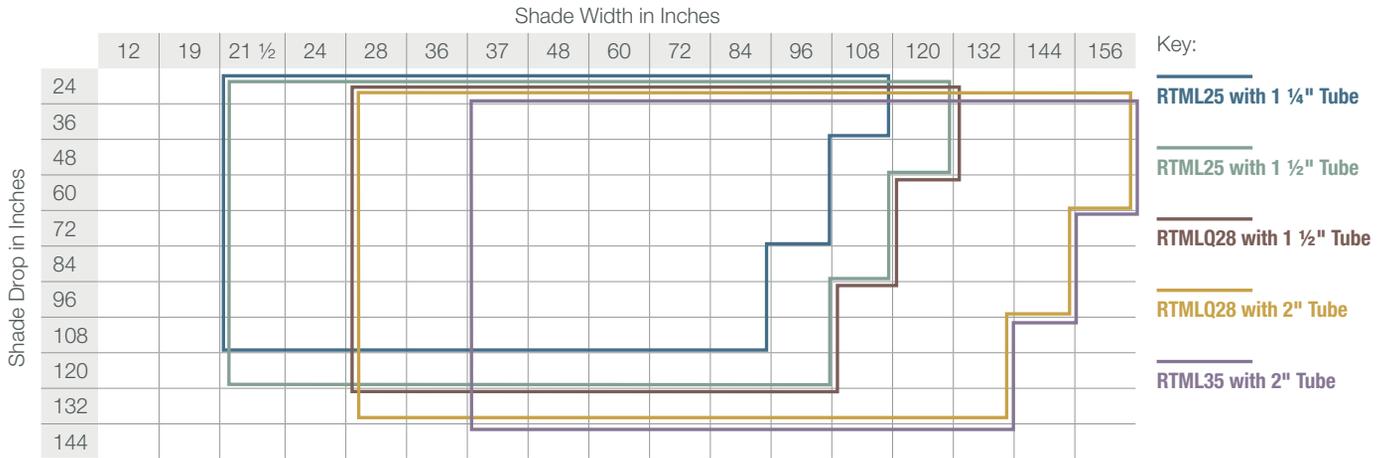

Fabric weight between 10 and 15 ounces per square yard

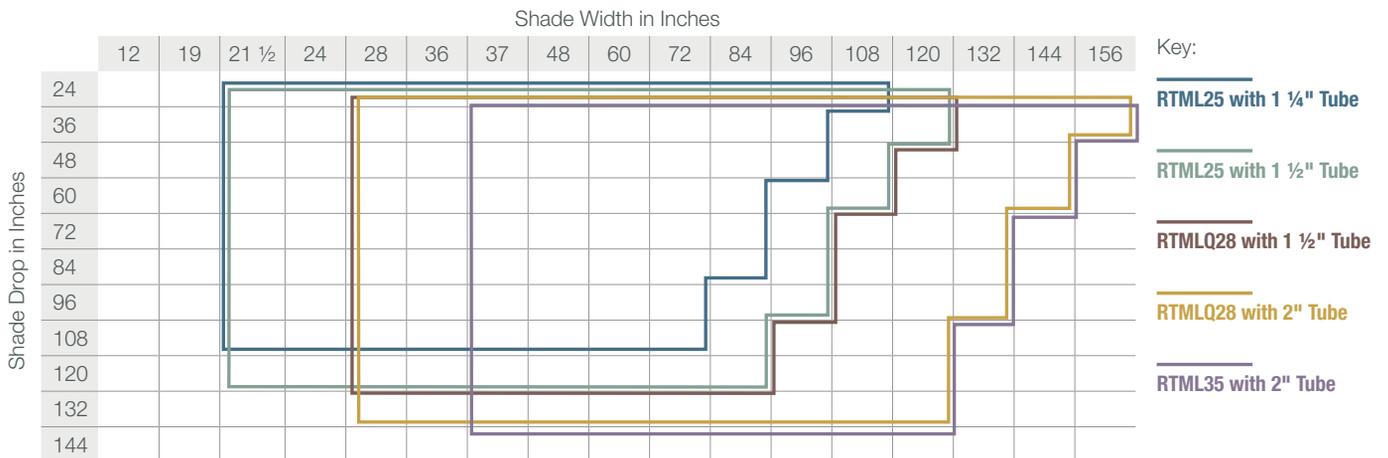

Fabric weight between 16 and 20 ounces per square yard

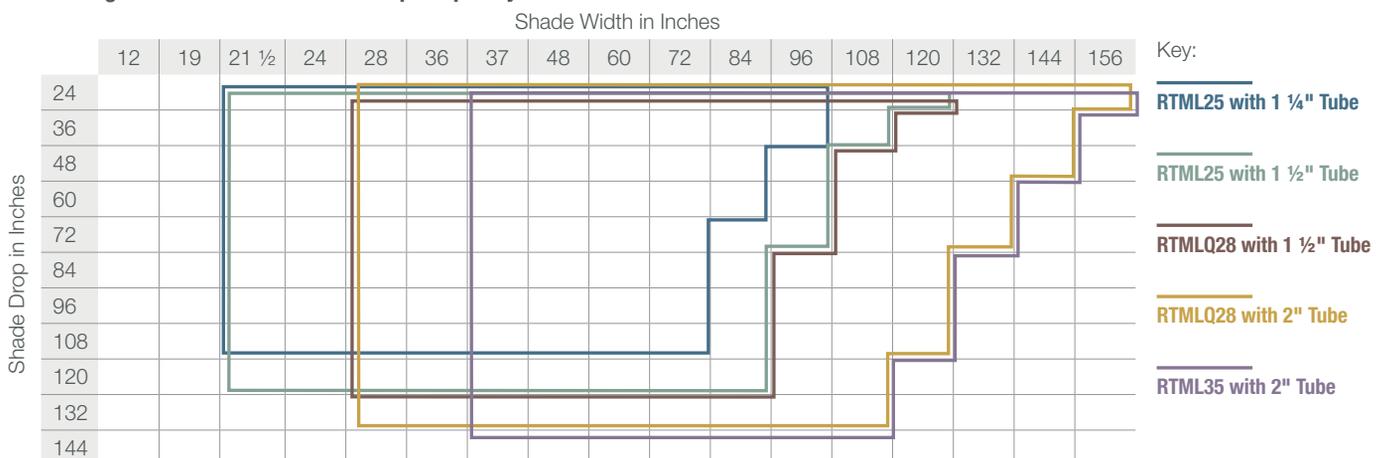


WIREFREE TUBULAR MOTOR WITH ATTACHED WAND CONTROL



PARTS LIST

1. Wirefree Tubular Motor with Attached Wand Control RTMLW25
2. Wall Charger for Wand RTMLWC6
3. Aluminum Roller
 - a. Length Options: 4', 6', 8', 12' or 16'
 - b. Roller Size: 1 1/4" or 1 1/2"
4. Drive Set Kit - matches Motor & Aluminum Roller Size
5. Brackets & Bracket Covers (covers are optional for Roller Shade only)
6. Wand
 - a. 24" RTMW24/W
 - b. 36" RTMW36/W
 - c. 48" RTMW48/W
7. Additional Roman or Roller Components:
 - a. If building Roman Shade:
 - Lift Band Shade - Lift Band Material, Fiberglass Ribs, Rib Center Support Rings & End Caps & Weight Bar
 - Lift Cord Shade - Soft Shade Roller Clips, Encased Lift Cord Shroud Tube or Tape & Weight Bar
 - b. If building Roller Shade:
 - Weight Bar

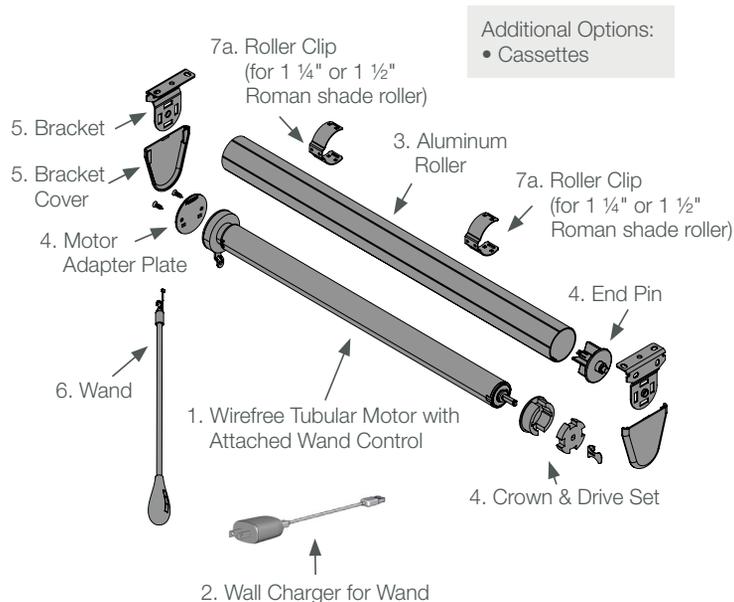


Installation Instructions:




MOTOR & POWER OPTION DIMENSIONS



Wirefree Tubular Motor with Attached Wand Control
RTMLW25

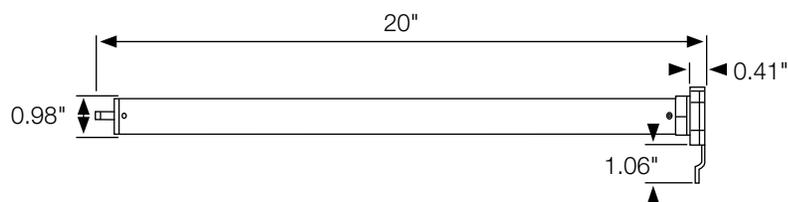

Wall Charger for Wand
RTMLWC6

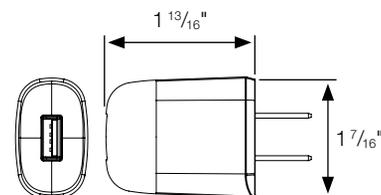

Wand

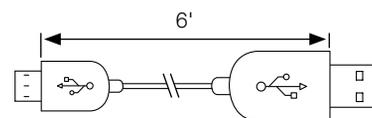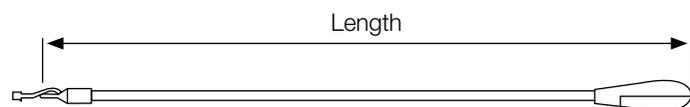

	Length
RTMW24/W	24"
RTMW36/W	36"
RTMW48/W	48"

MOTOR SELECTION GUIDE FOR ROLLER SHADES

- Find the chart with the proper range of the shade fabric weight.
- In the chart, find the shade width and drop. The color-coded boundaries indicate the systems that will work with the shade you are considering. There are usually more than one choice. Choose a system so your shade is well within its boundary.
- If there are multiple shades in one room or along the same wall, one should usually choose the same tube diameter and motor for all of them if possible, so shades will operate in sync.
- If the shade is narrow and to the left side the system boundary, consider using DC tubular motor systems.
- For the Motor Selection Guide for Roman Shades, see [page 14](#).


Fabric weight that is less than 10 ounces per square yard



Fabric weight between 10 and 15 ounces per square yard



Fabric weight between 16 and 20 ounces per square yard

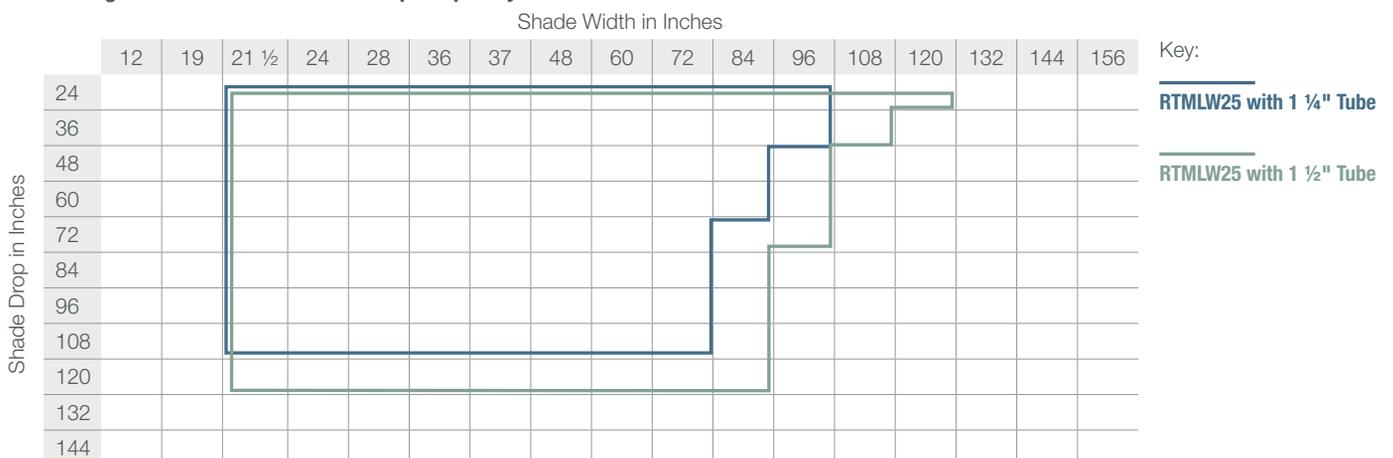


DC TUBULAR MOTORS



PARTS LIST

1. DC Tubular Motor
 - a. 25 mm Motor Size: RTMDC25
 - b. 28 mm Motor Size: RTMDCQ28
 - c. 35 mm Motor Size: RTMDC35
2. Power Source:
 - a. Battery Tube for 25 mm Motor RTMDCBT
 - b. Battery Pack for 25/28 mm Motors RTMDCHCBP
 - c. Power Supply RTMDC18/25 or RTMDC28/35
3. Aluminum Roller
 - a. Length Options: 4', 6', 8', 12' or 16'
 - b. Roller Size: 1 1/4", 1 1/2" or 2"
4. Drive Set Kit - matches Motor & Aluminum Roller Size
5. Brackets & Bracket Covers (covers are optional for Roller Shade only)
6. R-TEC Smart Controls: Custom systems include 1 Channel Handheld Remote with Wall Mount. Additional control options shown on [pages 18 - 19](#).
7. Additional Roman or Roller Components:
 - a. If building Roman Shade:
 - Lift Band Shade - Lift Band Material, Fiberglass Ribs, Rib Center Support Rings & End Caps & Weight Bar
 - Lift Cord Shade - Soft Shade Roller Clips, Encased Lift Cord Shroud Tube or Tape & Weight Bar
 - b. If building Roller Shade:
 - Weight Bar

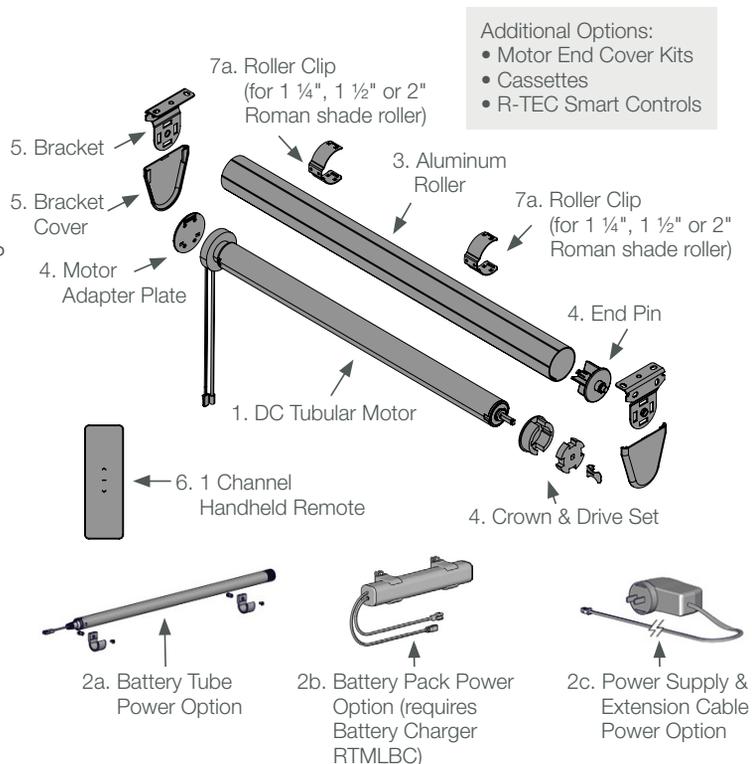

Additional Options:


- Motor End Cover Kits
- Cassettes
- R-TEC Smart Controls

Installation Instructions:



MOTOR DIMENSIONS


DC Tubular Motor

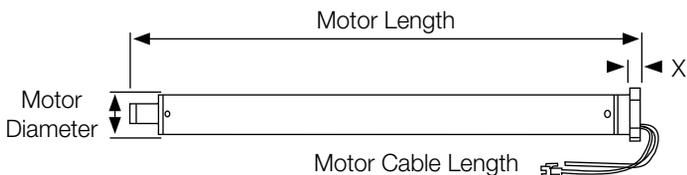


	Motor Size	Motor Length	Motor Diameter	X	Motor Cable Length
RTMDC25	25 mm	11.77"	0.98"	0.35"	6.25"
RTMDCQ28	28 mm	17.41"	1.13"		6.25"
RTMDC35	35 mm	18.07"	1.38"		6"

POWER OPTION DIMENSIONS


Battery Tube
RTMDCBT

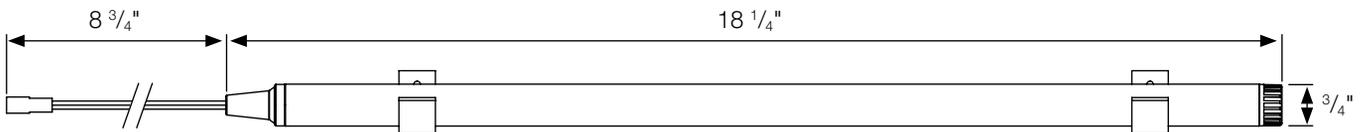


Battery Pack
RTMDCHCBP

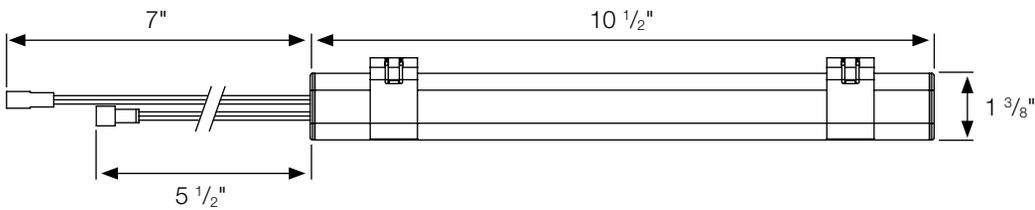


Solar Panel Battery Charger
RTMSOLAR2

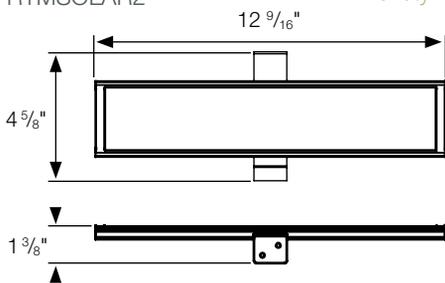

Power Supply for 25 mm DC Motor
RTMDC18/25

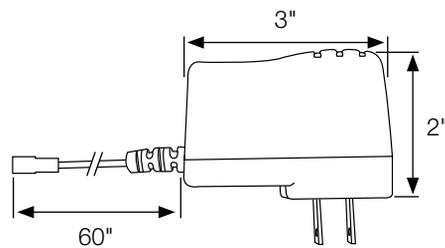


Power Supply for 28 mm or 35 mm DC Motors
RTMDC28/35

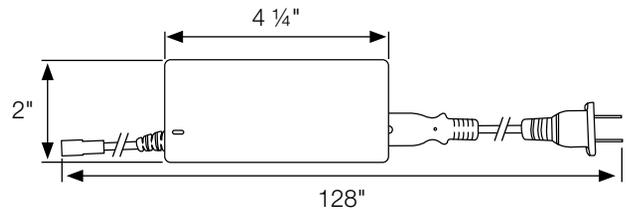


MOTOR SELECTION GUIDE FOR ROLLER SHADES

- Find the chart with the proper range of the shade fabric weight.
- In the chart, find the shade width and drop. The color-coded boundaries indicate the systems that will work with the shade you are considering. There are usually more than one choice. Choose a system so your shade is well within its boundary.
- If there are multiple shades in one room or along the same wall, one should usually choose the same tube diameter and motor for all of them if possible, so shades will operate in sync.
- For the Motor Selection Guide for Roman Shades, see [page 15](#).


Fabric weight that is less than 10 ounces per square yard

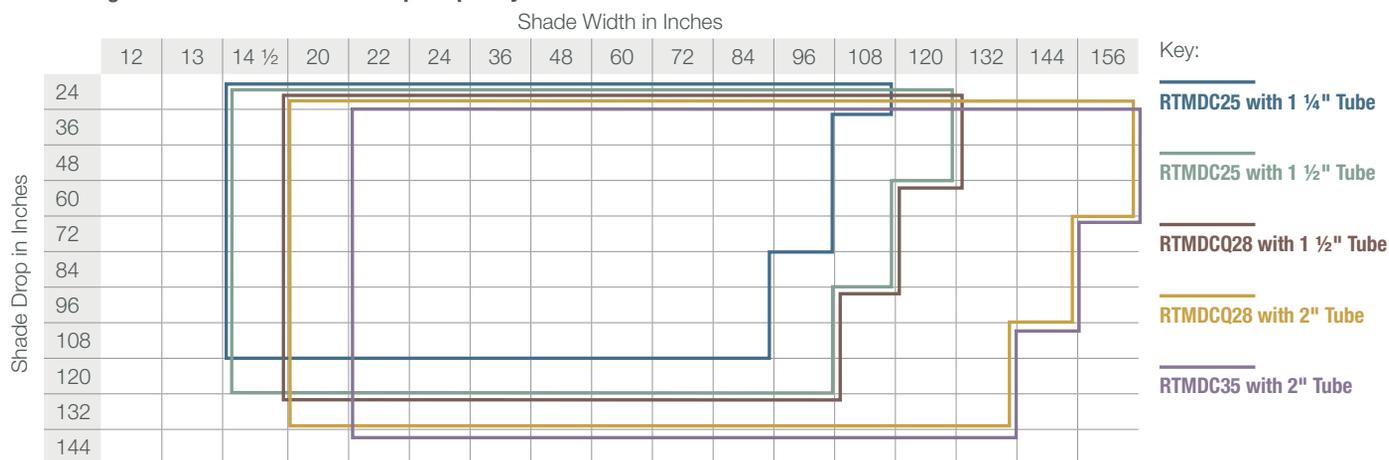

Fabric weight between 10 and 15 ounces per square yard

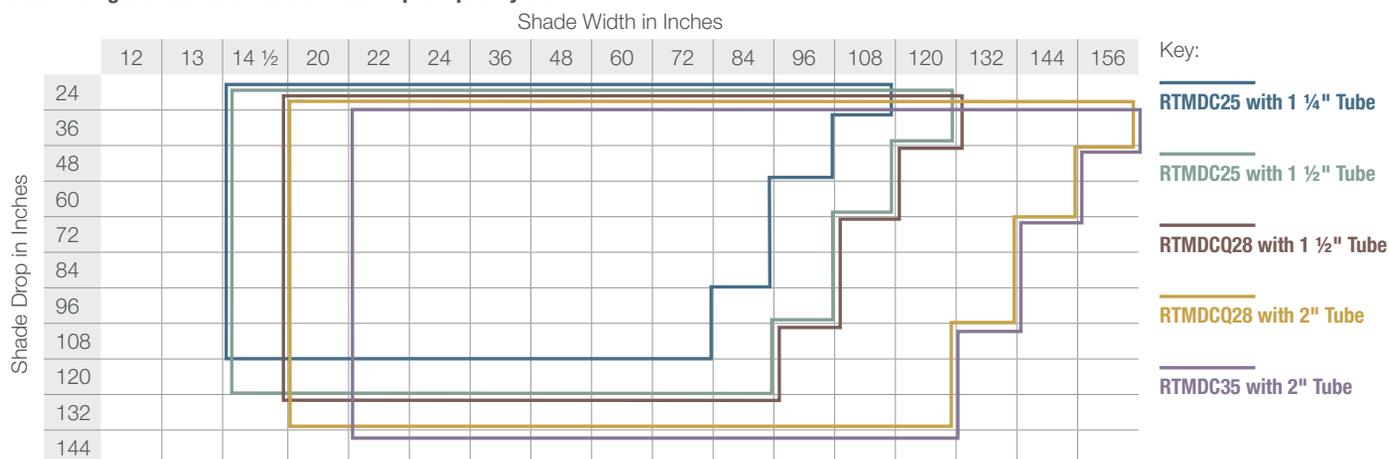


Fabric weight between 16 and 20 ounces per square yard

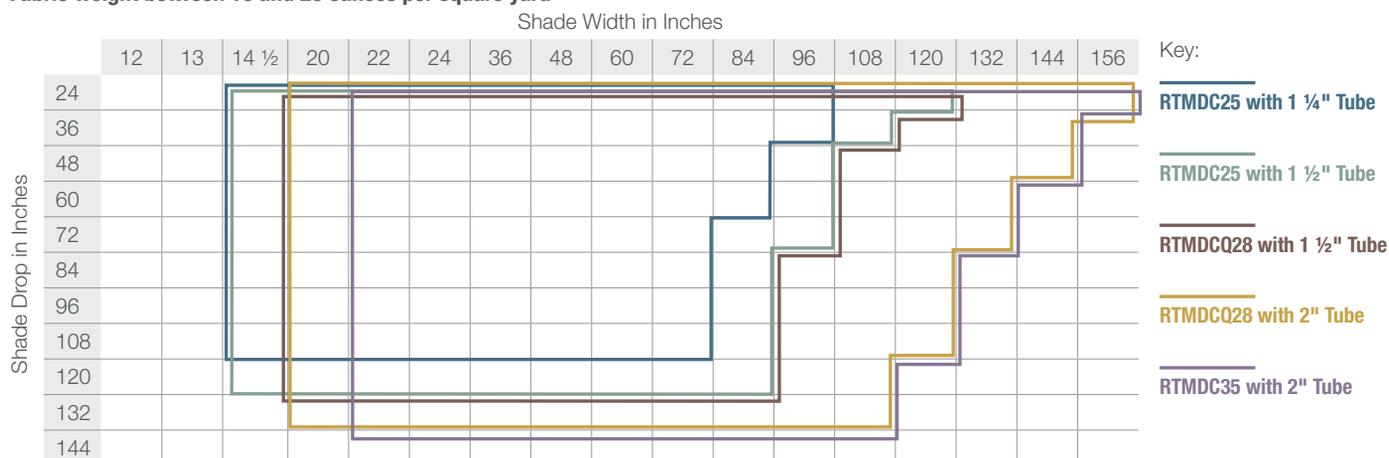


MOUNTING BATTERY TUBE OR PACK TO THE DUSTBOARD

Mounting the Battery Tube to the Dustboard

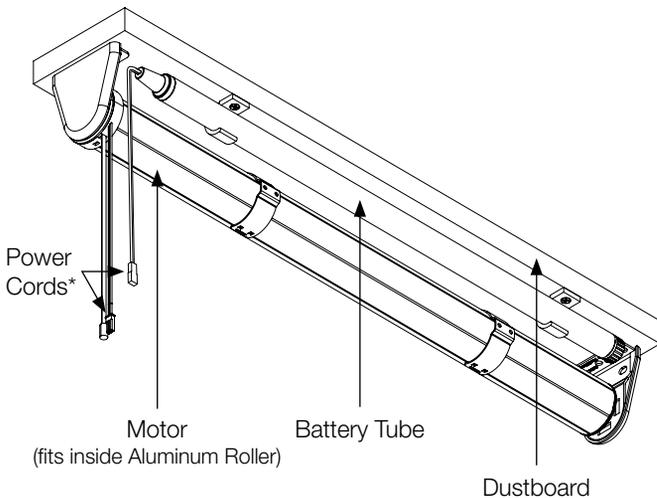

Mounting the Battery Pack to the Dustboard

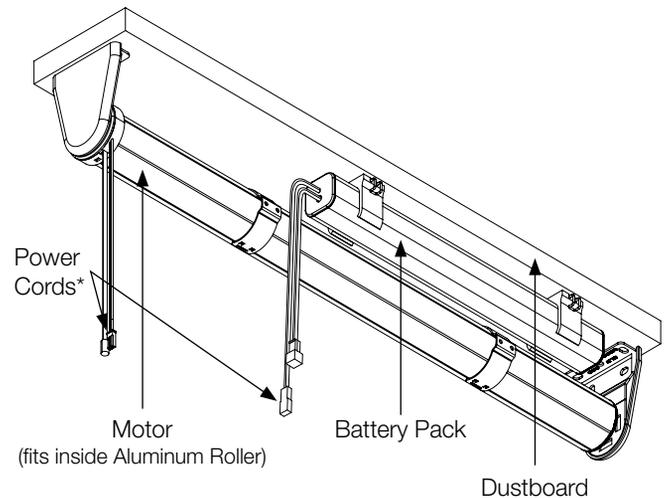


*Power Cords plug into each other from the Motor to the Battery Tube or Battery Pack. Keep cords away from rotating parts of the shade during operation.

SKYLINE EASY LINK SYSTEM




- Allows for multiple shades to be controlled by a single motor.
- Can be used in applications requiring narrow brackets.
- Allows for minimal gaps between each shade.
- Reduces the number of controllers required.
- Total allowable shade weight still determined by the single motor.
- Retractable drive components for easy assembly into the brackets.

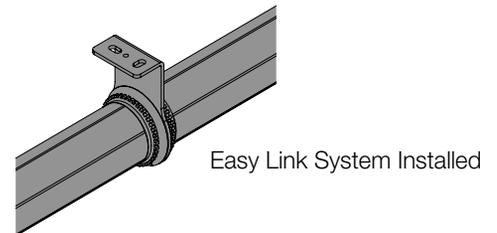

PARTS LIST


1. Skyline Easy Link System: includes Bracket, Bearing, Female Drive & Male Drive.
 - a. 1 5/8" projection: RTMELKIT1
 - b. 2 1/8" projection: RTMELKIT2
2. Motor & Power Source (see previous pages for options)
3. Aluminum Roller
 - a. Length Options: 4', 6', 8', 12' or 16'
 - b. Roller Size: 1 1/2"
4. Brackets & Bracket Covers (covers are optional for Roller Shade only)
5. R-TEC Smart Controls: Options shown on [pages 18 - 19](#).
6. Additional Roman or Roller Components:
 - a. If building Roman Shade:
 - Lift Band Shade - Lift Band Material, Fiberglass Ribs, Rib Center Support Rings & End Caps & Weight Bar
 - Lift Cord Shade - Soft Shade Roller Clips, Encased Lift Cord Shroud Tube or Tape & Weight Bar
 - b. If building Roller Shade:
 - Weight Bar

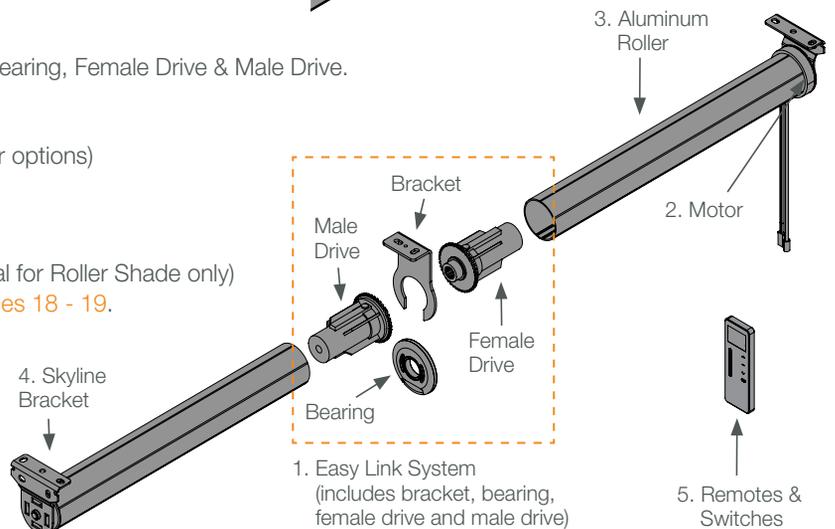


MOTOR SELECTION GUIDES FOR ROMAN SHADES

WIREFREE TUBULAR MOTORS

- Roman shades use 1 ¼", 1 ½" or 2" tube.
- See the Key for the maximum shade drop.
- Weigh or estimate the total shade weight (including shade ribs, bottom weight bar etc). The shade total weight does not include the dust board.
- In the chart, find the shade width and total shade weight. The color-coded boundaries indicate the motors that work with the shade you are considering. If both motors work, choose the one that your shade is well within its boundary.
- If the shade is narrow and to the left side of both system boundaries, consider using DC tubular motor systems.

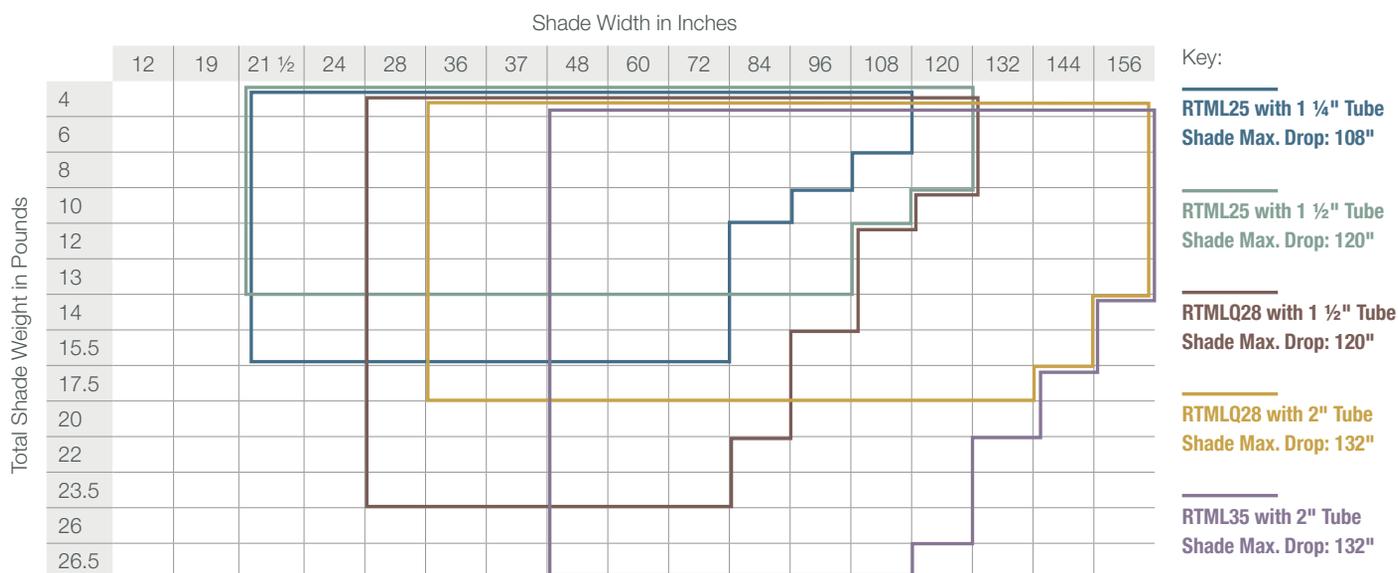


WIREFREE TUBULAR MOTOR WITH ATTACHED WAND CONTROL

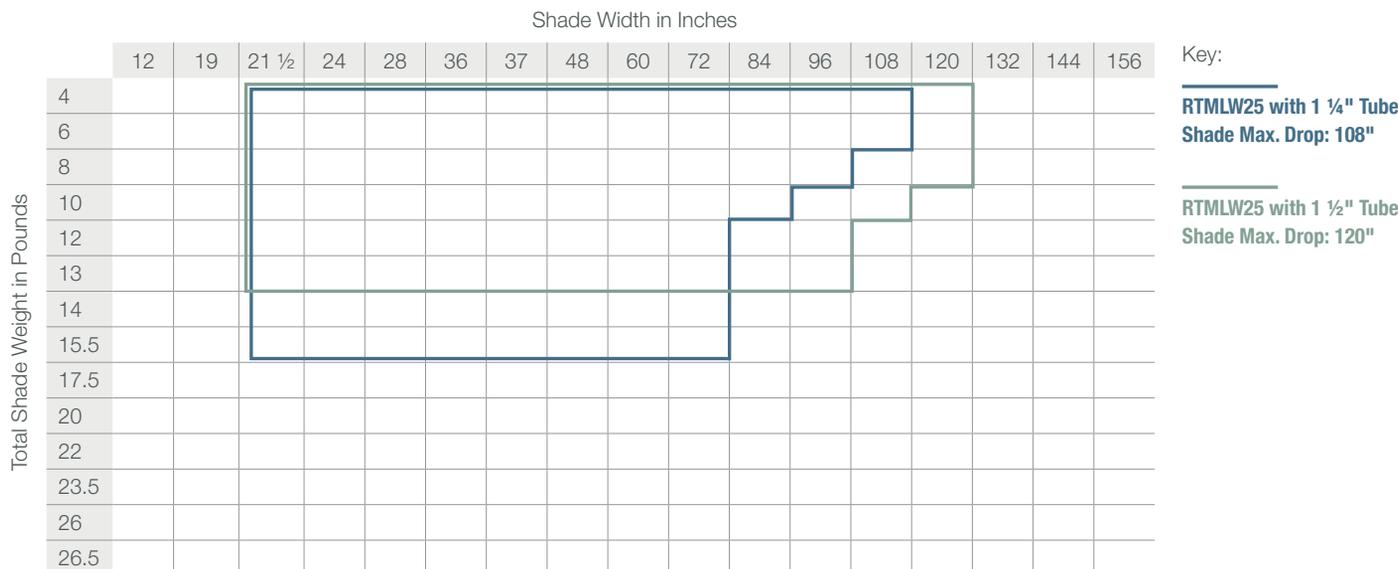


DC TUBULAR MOTORS

- Roman shades use 1 ¼", 1 ½" or 2" tube.
- See the Key for the maximum shade drop.
- Weigh or estimate the total shade weight (including shade ribs, bottom weight bar etc). The shade total weight does not include the dust board.
- In the chart, find the shade width and total shade weight. The color-coded boundaries indicate the motors that work with the shade you are considering. If both motors work, choose the one that your shade is well within its boundary.

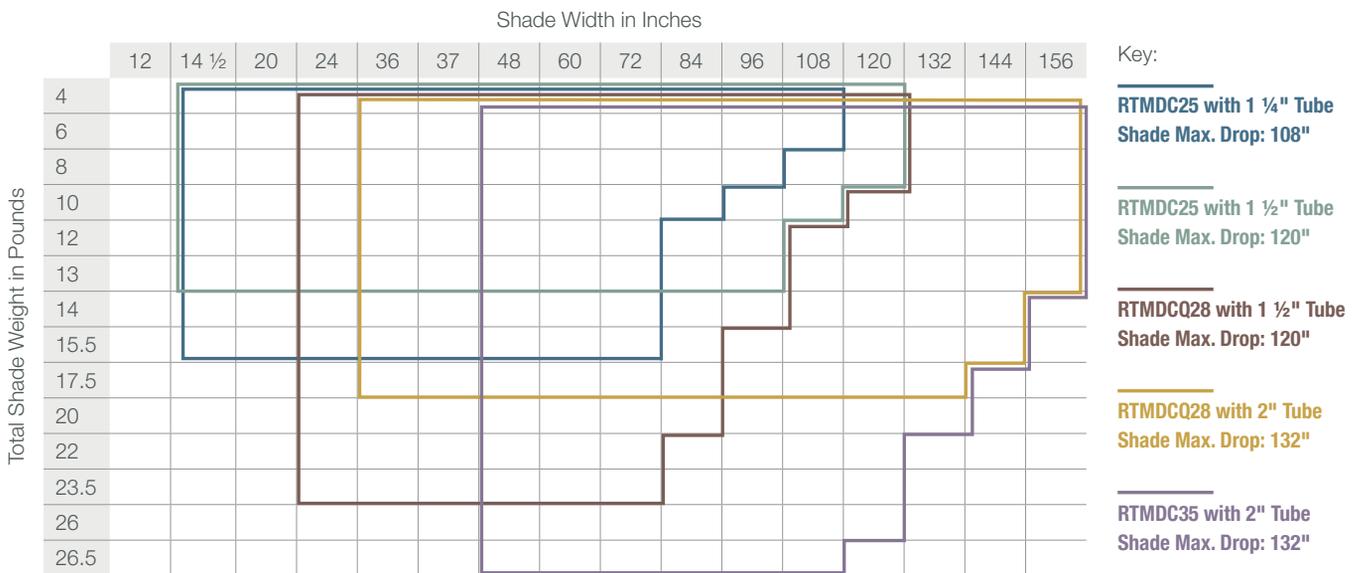


ROMAN SHADE CROSS SECTION

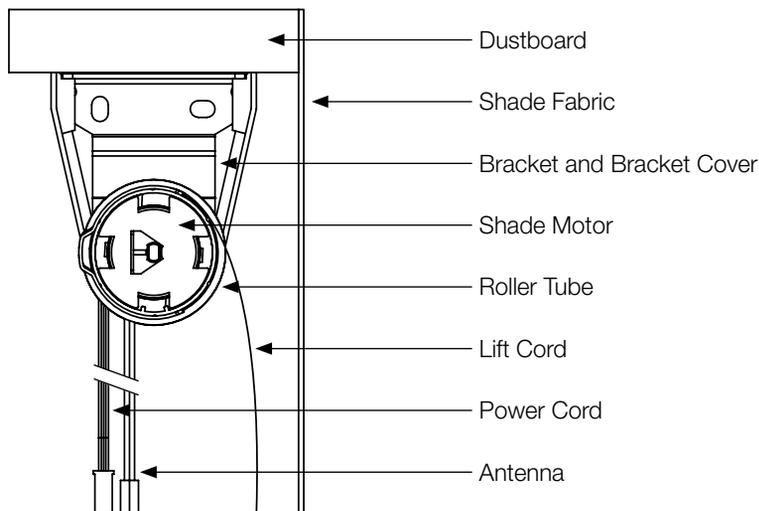


SKYLINE BRACKETS

SKYLINE BRACKET & COVER DIMENSIONS

Skyline Bracket
RSB10

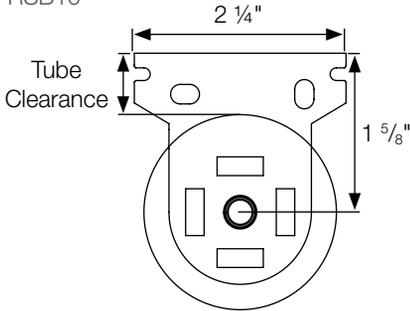


Skyline Bracket
RSB20

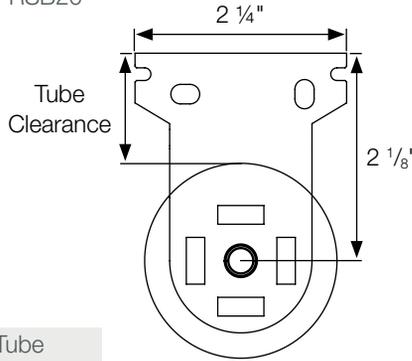


	1 1/4" Tube Clearance	1 1/2" Tube Clearance	2" Tube Clearance
RSB10	1"	7/8"	5/8"
RSB20	1 1/2"	1 3/8"	1 1/8"


Skyline Bracket Cover for RSB10
RSBC10/

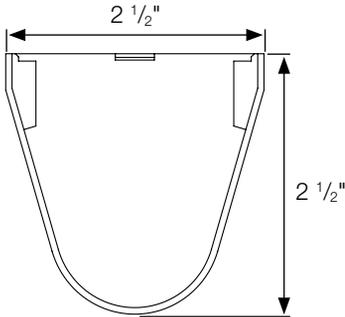


Skyline Bracket Cover for RSB20
RSBC20/

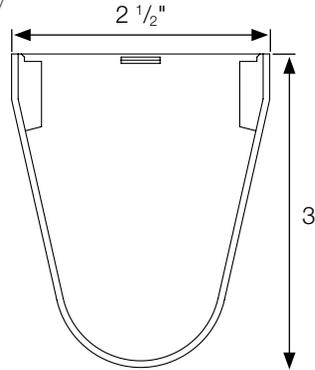


Narrow Skyline Bracket
RSNB10

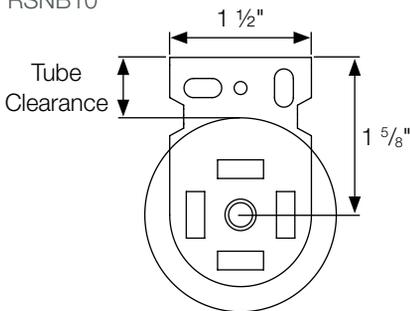

Narrow Skyline Bracket
RSNB20

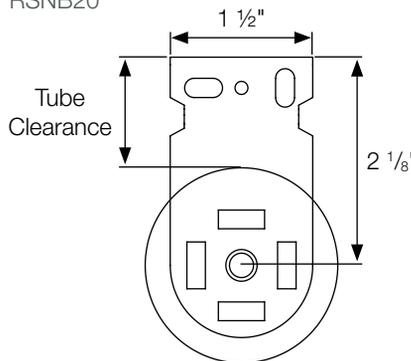

Narrow Skyline Bracket
RSNB30

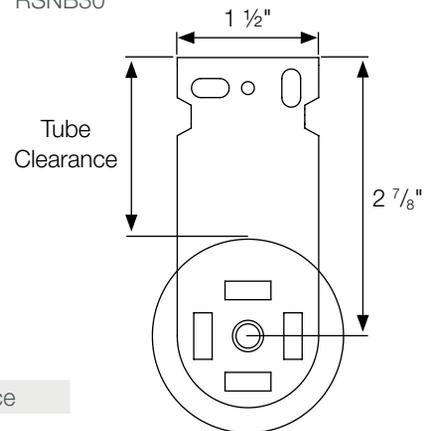


	1 1/4" Tube Clearance	1 1/2" Tube Clearance	2" Tube Clearance
RSNB10	1"	7/8"	5/8"
RSNB20	1 1/2"	1 3/8"	1 1/8"
RSNB30	2 1/4"	2 1/8"	1 7/8"

Note: Narrow brackets do not work with Bracket Covers.

SKYLINE BRACKET SELECTION GUIDE FOR ROLLER SHADES

- Find the chart with the tube size you are going to use.
- In the chart, find the shade fabric thickness and drop. If the fabric thickness is a between the values, go to the next larger value. For example, if the fabric thickness is 0.024", find 0.03 fabric thickness in the chart. The color-coded areas indicate which bracket works with the shade you are considering.

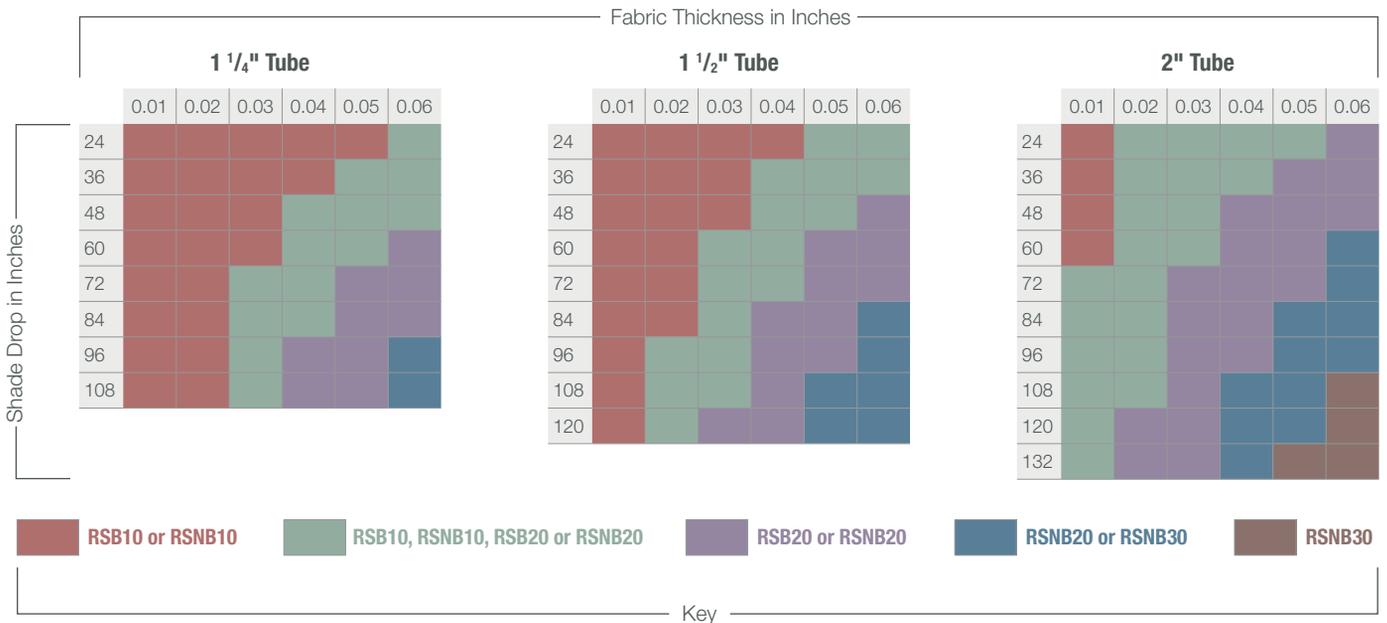

*Note: Use only RSB10 or RSNB10 for Roman Shades.

R-TEC SHADE CUSTOM OPTIONS

CUSTOM SOLUTIONS




custom solutions

- Save yourself valuable time, our in-house experts will fully assemble your R-TEC Automation[®] Shade System.
- The system ships to you completely ready for your fabric to be attached.
- The custom solution for Tubular Motor Shades includes motor, power supply, aluminum roller, brackets & bracket covers, drive set kit, wood shade slat and a 1 channel handheld remote with wall mount or wand.
- See [pages 18 - 19](#) for alternative remote options.
- Ships in 5 business days.
- Shades up to 102" in width are typically shipped FedEx Ground[®].
- For more information, contact Rowley sales and ask about Custom Solutions, or visit bit.ly/R-TEC-Auto-Shades-CS.


R-TEC SMART CONTROLS

HANDHELD REMOTES WITH WALL MOUNTS


1 Channel Remote
Range: 65'
RTMHR1C

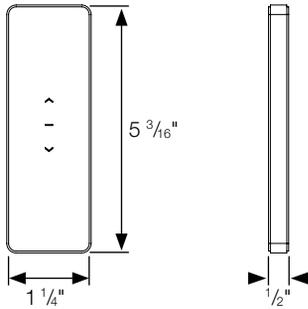

5 Channel Remote
Range: 65'
RTMHR5C

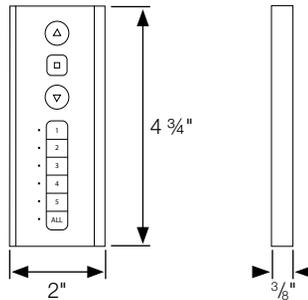


15 Channel Remote
Range: 65'
RTMHR15C

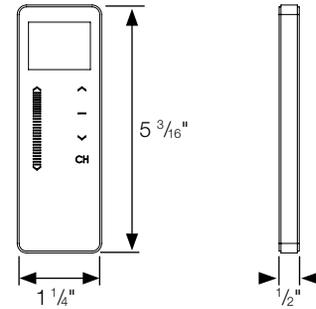


WALL SWITCHES

5 Channel Surface Mount Wall Switch
Range: 65'
RTMWSR5C

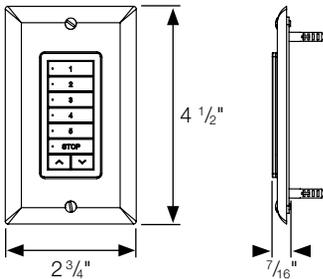


15 Channel Wall Box Mount Switch
Range: 65'
RTMWSR15C

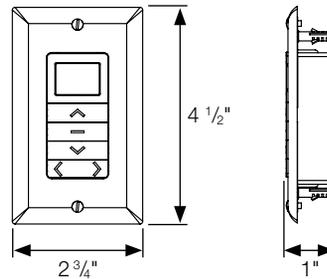


SUN SENSOR

Interior Sun Sensor
Range: 65'
RTMISS

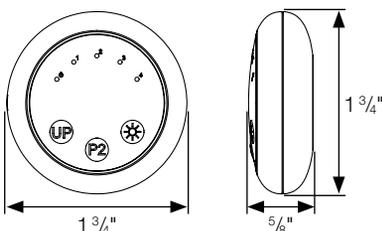


SIGNAL REPEATER

ARC USB Signal Repeater
Extends the wireless range of the R-TEC Hub and Remotes up to 60'
Maximum 2 per system or network
RTMUSR

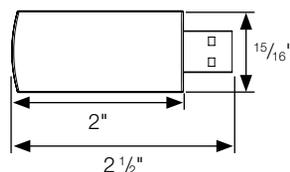



Wall Charger for USB Signal Repeater
RTMLWCW

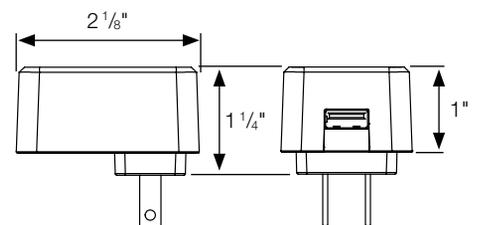

R-TEC AUTOMATION® HUB & APP CAPABILITIES

The R-TEC Automation® Hub and App integration allow window treatments to be controlled directly from a smartphone or integrated device while at home or away. Now available in the Apple® App Store or Google Play™, search for Rowley to find and download the new R-TEC Automation® App. As an alternative, remotes and wall switches allow for individual, group and all control for a customized solution with 1, 5 or 15 channel options.

R-TEC Hub with 2-Way RF | Range: 60'
 The R-TEC Hub provides the heartbeat of the R-TEC Automation® experience. With Wi-Fi built in, simply plug in where convenient and connect to the local network.
 RTMHUB2

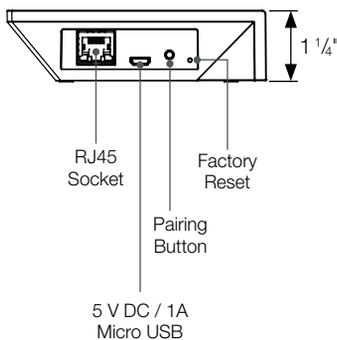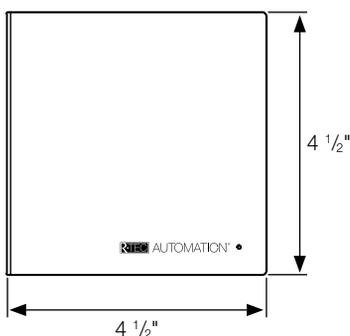

Our R-TEC Automation® App enables simple, intuitive control and system configuration from your smartphone or tablet. Compatible with R-TEC Hub.

GET IT ON
Google Play

Download on the
App Store

COMPATIBLE SYSTEMS - NOT SOLD BY ROWLEY

Apple HomeKit
 Simply set up the R-TEC Hub and App then instruct Siri to control your window treatments, with your voice, via a variety of Apple devices.

Amazon Alexa
 Conveniently ask Alexa to open and close your window treatments with the power of your voice.

Google Home
 Gives you control via a simple voice command. Use your Google phone for on-the-go control.

IFTTT - If This Then That
 A free online tool that connects services to create new experiences, such as weather apps, offering the ability to detect sunrise for opening window treatments.



IFTTT

R-TEC Automation® is a convenient, comfortable, lifestyle solution that integrates smart technology solutions allowing you to conveniently control window treatments throughout the home.

The R-TEC Automation® Hub and App integration allow window treatments to be controlled directly from a smartphone or integrated device while at home or away. As an alternative, remotes and wall switches allow for individual, group and all control for a customized solution with 1, 5 or 15 channel options.

CUSTOMER SERVICE HOURS

Monday - Friday 8am - 6pm ET

PHONE: 866.985.3423 | FAX: 800.554.0407

EMAIL: RTECAutomation@RowleyCompany.com

ORDER ONLINE: RowleyCompany.com

R-TEC Automation® Shade Systems ship within 5 business days.

