EZ Rig Soft Shade Systems 🖳 🔲

System Highlights

- Easiest on the market to assemble, install and operate.
- Self-contained, stationary drive system with individual drums.
- Simply slide drums onto square drive rod, install into track headrail and finish with clutch and end cap.
- Easily adjust drum position in track.
- Cone-shaped drum on each column of <u>1.4 mm lift</u> ensures tangle-free winding.
- Minimum 15" x 15". Maximum 168" x 132".
- Two Clutch sizes available: 15 lbs. or 20 lbs. limit.
- Can be <u>ceiling or wall</u> mounted to accommodate all shade installations. Use ceiling brackets to board mount.
- Low profile <u>track headrail</u>, mounting board not required. Available with hook tape applied for mounting shade directly to track.
- Front / Standard or Reverse Mount.
- Drive Tension Device CT70/ makes the system safety compliant.



Ordering Preference

Select whether to fabricate your EZ Rig Soft Shade System yourself, or have Rowley® do the work for you.

» ORDER BY COMPONENTS

• Quick Order Checklist to right.

» CUSTOM SOLUTIONS

- Our in-house experts will do the work for you and assemble your made-to-order shade system(s).
- See Custom Solutions for info & form.
- Select systems and options available.


» SHADE STARTER KITS

- Include all items needed to build one 2' or 4' EZ Rig Soft Shade, excluding fabric.
- Get Started.

Become an Expert



Master your EZ Rig Soft Shade projects the first time with easy to follow installation instructions.

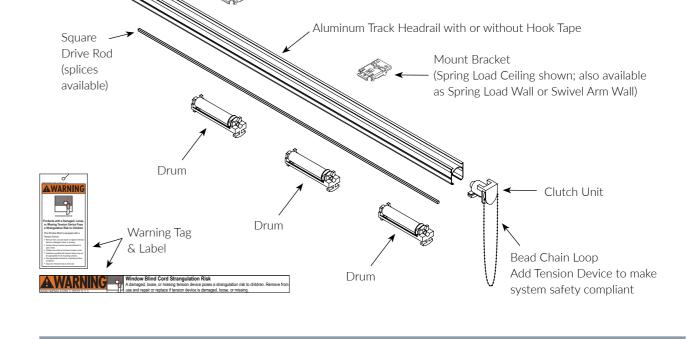

Mount Bracket

(Spring Load Ceiling shown; also available as Spring Load Wall or Swivel Arm Wall)

Quick Order Checklist

– End Cap

✓ Aluminum Track Headrail

- With or without Hook Tape
- 4', 8' or 12' length

✓ Square Drive Rod

• 4', 8' or 12' length; splices available

✓ Clutch Unit & End Cap

- Shade weight determines clutch unit size
- 15 lbs. or 20 lbs. limit

√ Mount Brackets

 Spring Load, available in Ceiling or Wall Mount, or Swivel Arm Wall Mount

✓ 1.4 mm Encased Lift Cord Shroud Tube

- White or Ivory
- Requires one Sew-On Ring per column of lift
- Consider Cord Adjuster Orbs

Drums

• One per column of Lift Cord

√ Control Components

- Left or Right
- <u>Drive Tension Device</u> White, Off-White, Clear or Black
- Plastic Bead Chain Loop 2', 3', 4', 5', or 6' length in White, Off-White, Gray or Black
- Alternatively, select Metal Bead Chain Loop
- Consider Chain Safety Shield

√ Warning Tag & Label

√ Weight Bar

• 3/8" Solid Steel Rod or Flat Weight Bar

✓ Ribs for Structure

- Round Fiberglass Ribs + Rib Guides (Center Supports & End Caps), Round Acrylic Ribs, Round Plastic Ribs, or Flat Fiberglass Ribs
- Consider Rib Tape