EZ Rise Cordless Roller Spring Shade Systems 🖳 🔲 🗍



System Highlights

- · Ideal for solar and laminated shades.
- Can be <u>ceiling or wall mounted</u> to accommodate all shade installations.
- Minimum 18" x 18". Maximum 96" x 96".
- Maximum Load 2 lbs. 7 ½ lbs. refer to the spring selection charts.
- Uses the 1 ½" Aluminum Roller Tube and can be adjusted for tension and stop points on site.
- Easy-to-set spring tension that stays secure after installation and can be adjusted on site.
- Front / Standard or Reverse Mount.
- Certified Best for Kids™.



Ordering Preference


Select whether to fabricate your EZ Rise Cordless Roller Spring Shade System yourself, or have Rowley® do the work for you.

» ORDER BY COMPONENTS

• Quick Order Checklist to right.

» CUSTOM SOLUTIONS

- Our in-house experts will do the work for you and assemble your made-to-order shade system(s).
- See Custom Solutions for info & form.
- Select systems and options available.




» SHADE STARTER KITS

- Include all items needed to build one 28" 48" or 36 ½" 72" EZ Rise Cordless Roller Spring Shade, excluding fabric.
- Get Started.

Become an Expert



Master your EZ Rise Cordless Roller Spring Shade projects the first time with easy to follow installation instructions.

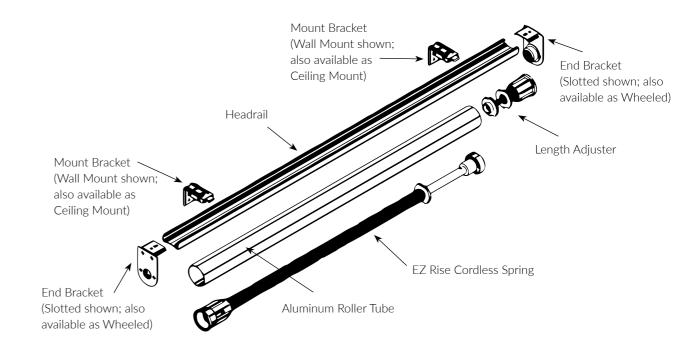

Quick Order Checklist

- √ EZ Rise Cordless Spring (Slow Rise Damper)
 - Shade weight determines spring size refer to the spring selection charts
- ✓ Aluminum Roller Tube
 - 4', 6', 8', 12' or 16' length
 - 1 ½" diameter
- ✓ End Brackets
 - Slotted (outside mount) or Wheeled (inside or outside mount)
 - White or Black
 - 2 ¾" or 3 ½6" height
- √ Length Adjuster for Stop Position
- √ Window Shade Spring Crank
- √ Headrail
 - 4', 6', 8' or 16' length
 - White or Black

- √ Mount Brackets
 - Wall or Ceiling
 - Zinc-Plated
- ✓ Bottom Bar
 - · Wood Shade Slat or Bottom Rail
- ✓ Laminating Adhesive
 - Gallon or Pint
- ✓ Room Darkening Shade Cloth
 - 36", 54" or 72" width
 - 3, 10 or 30 yard roll