


# System Highlights

- Great cord-free option for Roman shades.
- Can be [ceiling or wall mounted](#) to accommodate all shade installations.
- Minimum 18" x 18". Maximum 96" x 96".
- Maximum Load 2 lbs. - 7 ½ lbs. - refer to the [spring chart](#).
- Uses the [1 ½" Aluminum Roller Tube](#) and can be adjusted for [tension](#) and [stop points](#) on site.
- Easy-to-set spring tension that stays secure after installation and can be adjusted on site.
- Attach [Lift Band](#) directly to [Aluminum Roller Tube](#) or use [Roller Tube Clips](#) with [0.9 mm Encased Lift Cord Shroud Tube](#).
- Front / Standard or Reverse Mount.
- Certified Best for Kids™.

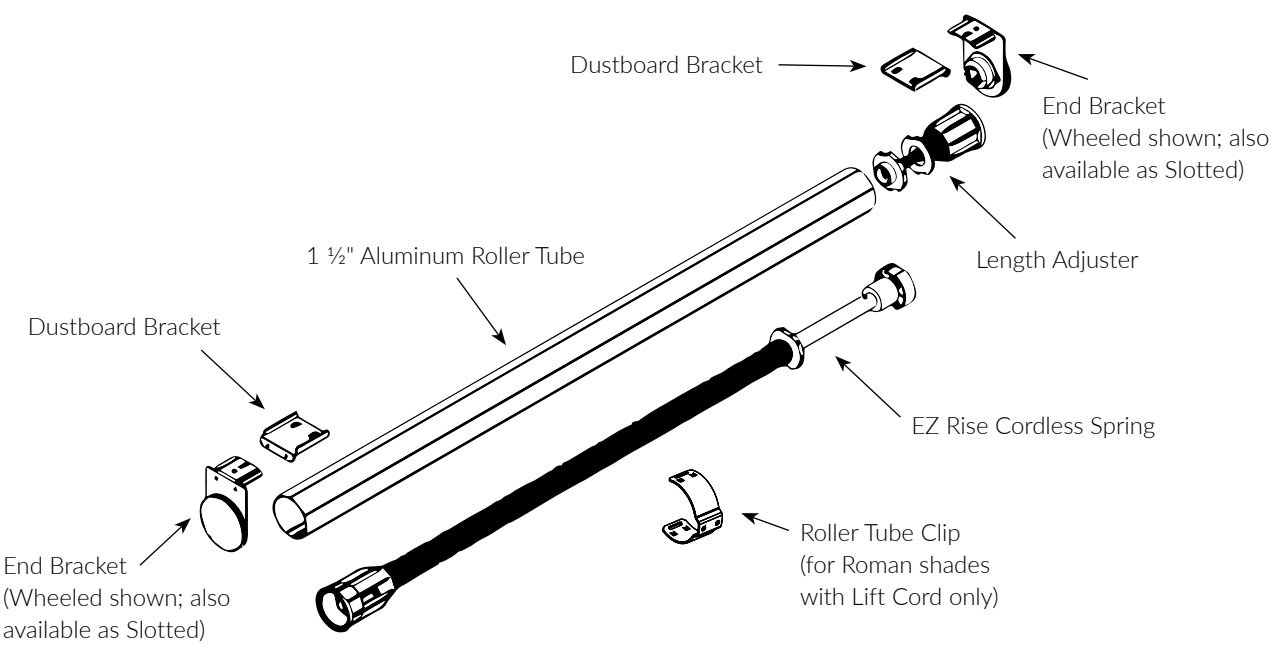

# Ordering Preference

Select whether to fabricate your EZ Rise Cordless Roman Spring Shade System yourself, or have Rowley® do the work for you.

## » ORDER BY COMPONENTS

- Quick Order Checklist to right.

## » CUSTOM SOLUTIONS

- Our in-house experts will do the work for you and assemble your made-to-order shade system(s).
- See [Custom Solutions](#) for info & form.
- Select systems and options available.



## » SHADE STARTER KITS

- Include all items needed to build one 37" - 48" EZ Rise Cordless Roman Spring Shade, excluding fabric.
- Lift Band or Lift Cord available.
- [Get Started](#).

## Become an Expert



Master your EZ Rise Cordless Roman Spring Shade projects the first time with easy to follow installation instructions.

# Quick Order Checklist

- ✓ [EZ Rise Cordless Spring](#) (Slow Rise Damper)
  - Shade weight determines spring size
- ✓ [Aluminum Roller Tube](#)
  - 4', 6', 8', 12' or 16' length
  - 1 ½" diameter
- ✓ [End Brackets](#)
  - Slotted (outside mount) or Wheeled (inside or outside mount)
  - White or Black
  - 2 ¾" or 3 ¼" height
- ✓ [Length Adjuster for Stop Position](#)
- ✓ [Window Shade Spring Crank](#)
- ✓ [Dustboard Brackets](#)
  - White
- ✓ [Weight Bar](#)
  - ⅜" Solid Steel Rod or Flat Weight Bar
- ✓ [Lift Band Option Components](#)
  - [Translucent Woven Buckram](#)
  - [Round Fiberglass Ribs](#) + [Rib Guides](#) (Center Supports & End Caps) recommended, but see alternative rib options listed below
- ✓ [Lift Cord Option Components](#)
  - [Roller Tube Clips](#) (1 ½" to match tube diameter)
  - [0.9 mm Encased Lift Cord Shroud Tube](#) in White or Ivory
  - Requires one [Sew-On Ring](#) per column of lift
  - Consider [Cord Adjuster Orbs](#)
  - Ribs for structure - below
- ✓ [Ribs for Structure](#)
  - [Round Fiberglass Ribs](#) + [Rib Guides](#) (Center Supports & End Caps), [Round Acrylic Ribs](#), [Round Plastic Ribs](#), or [Flat Fiberglass Ribs](#)
  - Consider [Rib Tape](#)