

## Basting Gun Instruction


### Load The Fastener Strip

Insert the fastener strip into the gun as shown in Fig.1. Make sure the strip is inserted into the gun until the leading fastener is in line with the needle.

### Apply Fasteners

Stick the needle straight into fabric, and pull the trigger while holding the gun steadily. Release the trigger and pull the gun straight out. To prevent the needle from being bent, do not twist or turn the gun during the whole process.

**Note: If the needle is bent, the plunger will be stuck inside the needle, the gun will not operate properly, and you have to replace the needle. Pay attention to the way the force applied as shown in Fig2.**




A. Front View




B. Top View

Figure. 1 Insert Strip

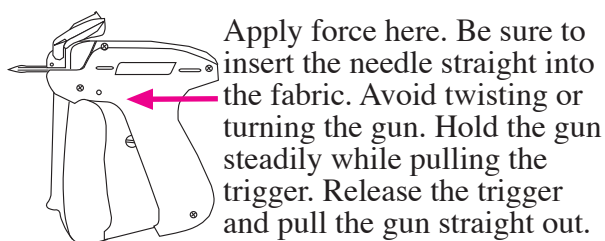

A. Right Way to Apply Force

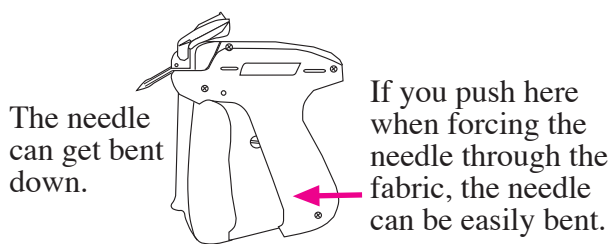

B. Wrong Way to Apply Force

Figure 2. Apply the Force

### Changing The Needle

Turn the needle locking lever 180 degrees as shown in Fig.3. Make sure the lever is exactly parallel to the needle and pointing forward in the needle pointing direction. Now you can often pull the needle out with your fingers if the needle is not severely bent. Otherwise you need to use a small pliers to pull the needle straight out. Insert a new needle into the gun as shown in Fig.4. Make sure the slot on the side of the needle lines up with the slot on the gun. Turn the needle locking lever 180 degrees backward to lock the needle.



Figure 3. Unlock Needle

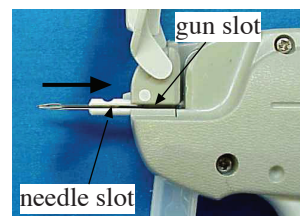


Figure 4. Insert Needle