







# Self-Drilling Toggle Instructions

Step 1) The arrows on the washer portion of the shell indicate the direction the wing opens. Try to position the wings so they do not hit a stud when they open behind the wall.

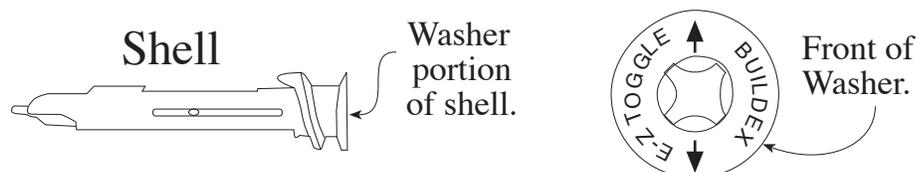

Step 2) So the screw does not thread incorrectly inside the shell, be sure to slightly angle the screw from the direction show below.

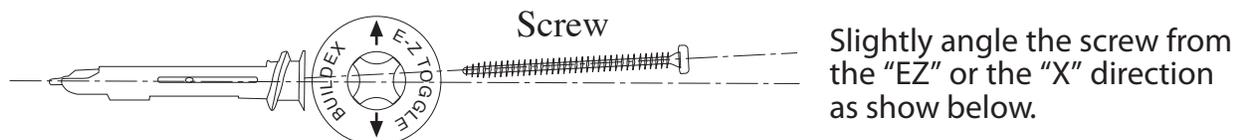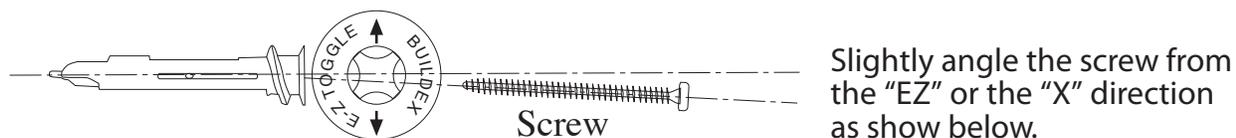

To remove this fastener from a wall, remove screw and unthread the large threaded portion of the shell. Lightly pull the threaded portion from the wall. Use wire cutters to cut the shell ribs adjacent to the wall.

**From our internal tests, these toggles can be installed almost 5 times faster than conventional toggles.**